

DH-ARC2016U (-G)


Bank Alarm Host



Features

- 16-ch local alarm input with cut off and short circuit protections
- 14-ch local alarm output
- Two independent access control, hand protect and safe room mode, audio announcement
- One group audio talk, build-in DSP crystal technology, echo cancellation special Codec chip
- IP network, PSTN and other network to upload alarm signal
- Adopt reliable power switch, compatible with storage battery
- Mobile alarm arming/disarming & WEB config
- 5000 log records
- I/O alarm RS485 control function
- GPRS (-G model)
- 8-ch alarm keyboard input
- High temperature alarm

Dimension

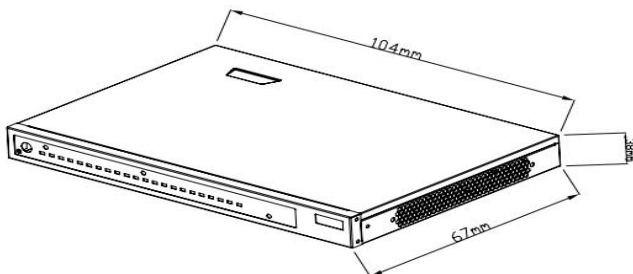

Technical Specifications

Model	DH-ARC2016U(-G)
Alarm Input	16-ch local switch alarm input
Alarm Output	14-ch local dry node alarm output (12-ch local weak electric and 2-ch local strong electric)
External Power Supply	1-ch DC 12V 1A, 1-ch DC 5V 1A, siren DC 12V 1A
Access Control	2 group
Sliding Door Control	2 group 30VDC 1.5A
Electric Lock Control	2 group 30VDC 1.5A
PSTN Alarm	Support
GPRS	-G model support
Log	5000 local logs
Tamper Alarm	1, Anti-tamper
Voice	Support WAV
Audio talk	1
Audio In	1-ch, 3.5mm JACK LINE IN
Audio Out	1-ch, 3.5mm JACK LINE OUT
RS485	2-ch, support alarm expansion and alarm keyboard
RS232	1-ch
Cable Network	1-ch 10/100M Ethernet, RJ45 port
Battery Powered	12V 7A
Supply	AC220V 50Hz
Power	<10W (Load power<50W)
Working environment	Working temperature:-30°C~+70°C
Overall dimensions	220×440×44.5mm
Weight	<3.5Kg
Installation	Chassis