

DHI-ITSE0804-GN5B-D

Front-end Storage



Order Information

DHI-ITASE-0804-GN5B-D

Features

- Embedded design for Linux and processing.
- 12 channel HD IP camera input, 4 channel analog camera input.
- Support image combining.
- 4 SATA ports for 3.5 and 2.5 inch HDD.
- Heat dissipation without mechanical fan, working environment -30°C ~ +70°C.
- Support video and snapshot synchronization.
- Support LCD screen, VGA and HDMI port



Technical Specifications

Model	ITASE-0804-GN5B-D
System resource	12 channel HD IP camera input(including pictures and video) 4 channel analog camera input
	Max 64Mbps incoming bandwidth, 64Mbps forward bandwidth
OS	Embedded Linux
UI	WEB or VGA/HDMI display
Audio input	1 channel;
Audio output	1 channel
Video input	12 channel IP compression HD video input, 4 channel analog camera input.
Alarm input	4 channel
Alarm output	4channel, relay output
Disk port	Max 4 SATA interface.
LCD screen	Display time, device information
eSATA port	1
RS232 serial port	2,One of them is used for debugging serial data
RS485 port	4

DHI-ITSE0804-GN5B-D

USB port	2
Display port	1 VGA,1 HDMI
Ethernet port	8 RJ45 10M/100M

Dimensions (mm)

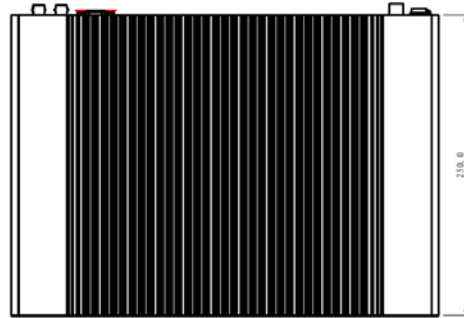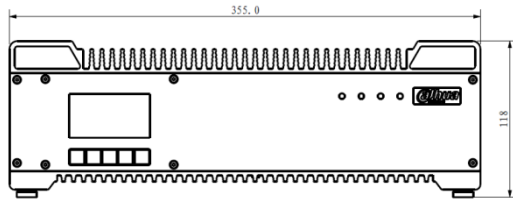

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.